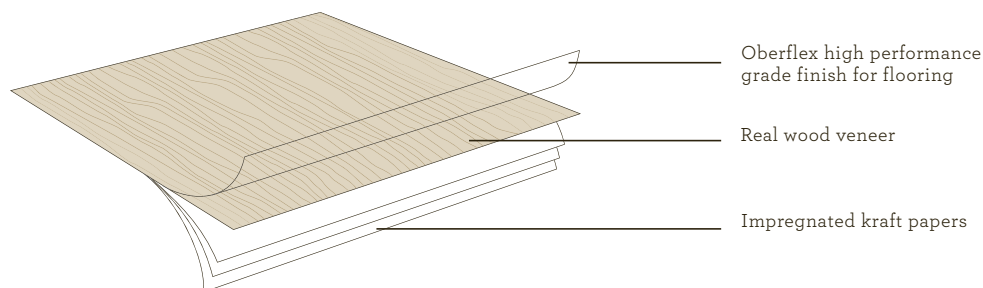

OBERFLEX TILES FOR FLOORING

Flooring tile with high performance Oberflex finish. Resistance to high traffic.
Adaptability to technical floorings.



TECHNICAL CHARACTERISTICS

Reinforced surface resistance thanks to the Oberflex in High Performance grade finish.

Wood species

Anigre, Light Oak, Oak T3, Canadian Maple, Light Ash, Steamed Beech, American Walnut T266, American Elm

Finishes

Satin

Standard dimensions

600 x 600 mm - 2520 x 1270 mm

Abrasion resistance

> 11 000 Taber revolutions

Scratch resistance

> 3 N

Fire ratings

M2 - M1 (on request)

THE RESISTANCE OF THE OBERFLEX FINISH



Abrasion resistance



Impact resistance



Scratch resistance



Light resistance



No attack by common-type products



Cigarette burning resistance



Can be cleaned with soapy water



Fire resistance